




TESNIT BA-50



TECHNICAL DATA SHEET

Basis

Aramide fibres, NBR.

General properties and application

Gasket material with good chemical resistance, for higher loadings. Very suitable economical quality for gas, food and chemical industries. Sealing of potable water.

Approvals

DIN-DVGW, KTW, WQc/WRAS, SVGW, Germanischer Lloyd, CRS

Dimensions of standard sheets

Sheet size: 1000 x 1500 mm, 1500 x 1500 mm

Thickness: 0.5 mm, 0.8 mm, 1.0 mm, 1.5 mm, 2.0 mm, 3.0 mm (other thicknesses on request)

Tolerances: Thickness: < 1 mm ± 0.1 mm, ≥ 1 mm ± 10 %, Length: ± 50 mm, Width: ± 50

Surface treatment: Treatment with graphite, PTFE and antistick coating is available on request.

Technical data

Typical values (thickness 2.0 mm)


Compressibility	ASTM F 36/J	8 %
Recovery	ASTM F 36/J	45 %
Tensile strenght	DIN 52910	9 MPa
Stress resistance	DIN 52913	
• 16h, 300°C, 50 MPa		20 MPa
• 16h, 175°C, 50 MPa		25 MPa
Specific Leak rate	DIN 3535/6	0.08 mg/(s.m)
Thickness increase	ASTM F 146	
• Oil IRM 903, 5h, 150°C		10 %
• ASTM Fuel B, 5h, 23°C		10 %
*Max. operating conditions		
Peak temperature		280°C / 536°F
Continuous temperature		220°C / 428°F
- with steam		180°C / 356°F
Pressure		80 bar / 1160 psi

* Temperature and pressure represent maximum values and should not be used simultaneously. They are given only for guidance, since they depend not only on the type of gasket material but also on the assembly conditions. Very important factors are: thickness of material, nature of service medium, type of flange, surface stress. Steam application requires special consideration.

- General suitability using common installation practices under the condition of chemical compatibility.
- Max. performance is ensure through appropriate measures for joint design and gasket installation. Consultation is recommended.
- Limited application area - Technical consultation is mandatory.


BA-50, 2 mm

EN 1514-1, Type IBC, PN 40/DIN 28091-2, 3.8

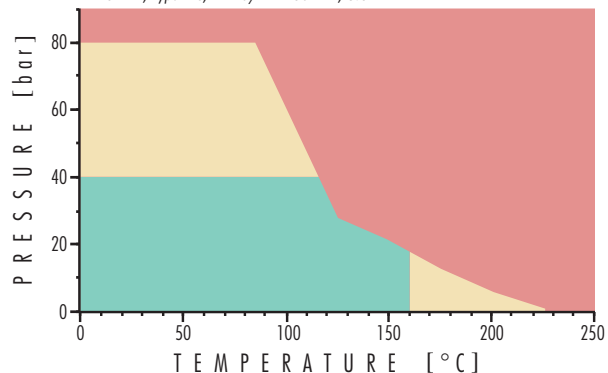

This edition cancels all previous issues. Subject to change without notice.

TESNIT BA-50



The recommendations made here are intended to be a guideline for the selection of the suitable gasket quality. Because the function and durability of the products depend upon a number of factors, the data may not be used to support any warranty claims.

● Recommended	■ Recommendation depends on operating conditions	▼ Not recommended
Acetamide	●	
Acetic acid 10%	●	
Acetic acid 100%	●	
Acetic ester	■	
Acetone	■	
Acetylene	●	
Adipic acid	●	
Air	●	
Alum	●	
Aluminium acetate	●	
Aluminium chlorate	●	
Aluminium chloride	●	
Ammonia	●	
Ammonium bicarbonate	●	
Ammonium chloride	●	
Ammonium hydroxide	●	
Amyl acetate	■	
Aniline	▼	
Asphalt	●	
Barium chloride	●	
Benzene	●	
Benzoic acid	●	
Boric acid	●	
Borax	●	
Butane	●	
Butyl alcohol	●	
Butyric acid	●	
Calcium chloride	●	
Calcium hydroxide	●	
Carbon disulphide	▼	
Carbon dioxide	●	
Chloroform	■	
Chlorine, dry	●	
Chlorine, wet	▼	
Chromic acid	■	
Citric acid	●	
Copper acetate	●	
Creosote	▼	
Cresol	■	
Cyclohexanol	●	
Cyclohexanone	▼	
Decaline	●	
Dibenzyl ether	▼	
Dimethyl formamide	▼	
Dowtherm	■	
Ethane	●	
Ethyl acetate	■	
Ethyl alcohol	●	
Ethyl chloride	■	
Ethylene	●	
Ethylene glycol	■	
Formic acid 10%	●	
Formic acid 85%	■	
Formaldehyde	●	
Freon 12	●	
Freon 22	■	
Fuel oil	●	
Gasoline	●	
Glycerine	●	
Heptane	●	
Hydraulic oil (Mineral)	●	
Hydraulic oil (phosphate ester type)	■	
Hydraulic oil (glycol based)	●	
Hydrazine	●	
Hydrochloric acid 20%	■	
Hydrochloric acid 36%	▼	
Hydrofluoric acid 10%	▼	
Hydrofluoric acid 40%	▼	
Hydrogen	●	
Isobutane	●	
Isooctane	●	
Isopropyl alcohol	●	
Kerosene	●	
Lead acetate	●	
Lead arsenate	●	
Magnesium sulphate	●	
Malic acid	●	
Methane	●	
Methanol	●	
Methyl chloride	■	
Methylene dichloride	▼	
Methyl ethyl ketone	■	
Milk	●	
Mineral oil type ASTM no. 1	●	
Naphtha	●	
Nitric acid 20%	▼	
Nitric acid 40%	▼	
Nitric acid 96%	▼	
Nitrobenzene	▼	
Nitrogen	●	
Octane	●	
Oleic acid	●	
Oleum	▼	
Oxalic acid	■	
Oxygen	●	
Palmitic acid	●	
Pentane	●	
Perchloroethylene	■	
Phenol	▼	
Phosphoric acid	●	
Potassium acetate	●	
Potassium bicarbonate	●	
Potassium carbonate	●	
Potassium chloride	●	
Potassium dichromate	●	
Potassium hydroxide	●	
Potassium iodide	●	
Potassium nitrate	●	
Potassium permanganate	●	
Propane	●	
Pyridine	▼	
Salicylic acid	●	
Silicone oil	●	
Soap	●	
Sodium aluminate	●	
Sodium bicarbonate	●	
Sodium bisulphite	●	
Sodium carbonate	●	
Sodium chloride	●	
Sodium cyanide	●	
Sodium hydroxide	■	
Sodium sulphate	●	
Sodium sulphide	●	
Starch	●	
Steam	●	
Stearic acid	●	
Sugar	●	
Sulphuric acid 20%	▼	
Sulphuric acid 96%	▼	
Tar	●	
Tartaric acid	●	
Toluene	●	
Transformer oil	●	
Trichloroethylene	■	
Water	●	
White Spirit	●	
Xylene	■	

MAJ: sifm - angleški jezik, 21.3.2003

In order to spread the most comprehensive knowledge of our products, our highly skilled group of experts organized in the technical-service department can assist you by solving practically any sealing problem. If you need our help, contact us.

DONIT TESNIT



DONIT TESNIT d.d.
 Cesta komandanta Staneta 38
 1215 MEDVODE, Slovenija
 telefon: +386 (01) 582 32 00
 fax: +386 (01) 582 32 06, 582 32 08
 E-mail: info@donittesnit.si
 http://www.donittesnit.si